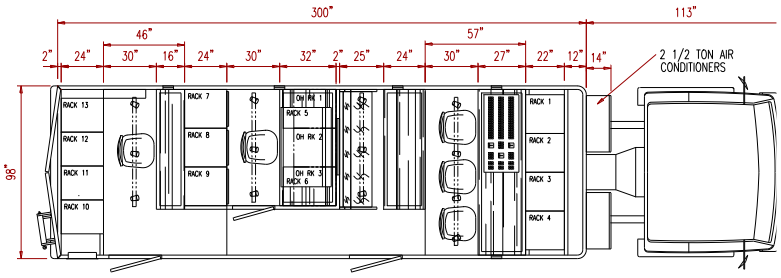

FLOOR PLAN

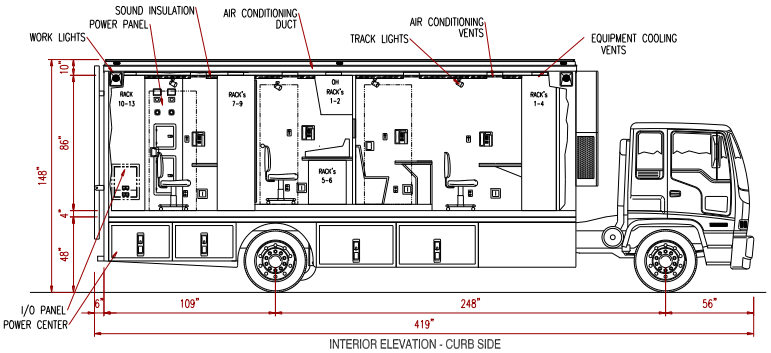

INTERIOR ELEVATION - CURB SIDE

Typical Floor Plan of an A-25 EFP

SHOOK A-25 EFP SPECIFICATIONS

CHASSIS

GMC T-series 33,000 lb. [14,968 kg] GVWR (Isuzu, Freightliner, Mercedes Benz, Mitsubishi, and Nissan Chassis are available as an option)
CAT 6.6 liter 275 HP CAT 3116 Electronic Diesel Engine
GMC 9 Speed RT8609 Fuller Manual Transmission
2 - 50 Gallon (189 Liter) Fuel Tanks
Power Assisted Steering
Air Brake System (Rockwell Q Series)
Dual Maintenance Free Batteries (1500 Amp)
Comprehensive Gauge Package with Voltmeter, Oil Pressure Temperature and Fuel Indicators
100 Amp 12Volt Alternator
Front Cab Air Conditioning
AM/FM Stereo Radio
Underbody Undercoating (Petroleum Based)
Laminated tinted glass
2 side view stainless steel mirrors

AVAILABLE OPTIONS

5 Speed Allison HD Automatic Transmission
Water Cooled Diesel Generator with Remote Start/Stop and Manual Shore power Changeover Switch
Manually Controlled Hydraulic Stabilizing Jacks
Custom Remote Controlled Electrically Operated Awnings
Right Hand Drive Option (Mercedes Benz, Mitsubishi and Volvo)
Logo from Customer Supplied Camera Ready Art work
A Wide Choice of Custom Interior Color Schemes
Custom Exterior Colors
DC Operated Cable Reels
30 - 42 –48 – 52 - 56 - 58 Foot Pneumatic Telescoping Mast
Multi Line Telephone system
GPS Satellite System With Compass
Satellite Telephone

HOUSING

.125 (3mm) Aluminum Skin Hard Bucked Riveted as Stainless Steel Low Maintenance Belly Boxes with Switched Interior Courtesy Lights, alarm switches and Ice Breaker latches.
Reinforced Interior Walls, Floor and Ceiling
Sound Reducing Ceiling Treatment
Industrial Grade Flame Retardant Tight Looped Anti-Static Carpet
Non-flammable, Hard Packed Fiberglass Insulation
Custom Built Equipment Racks with Operator Console
Custom Heavy Duty .125 Aluminum Tread Plate Roof Platform
Heavy Duty Rear Access Ladder
Exterior Paint is GMC Multi-Coat OEM paint (White) Other Colors are Available at Additional Cost
Dual 30,000 BTU Air Conditioner with Shook Hot Gas Bypass Valve Modification. Includes 5KW (x2) heat strip
UL® Approved Power Panel with Separate Circuit Breakers and Individual Power Strips in each rack
AC Wiring run in Seal-Tight steel reinforced Flexible Conduit
(1) Carbon Monoxide Detector (AC Operated) with generator
25 KVA Isolation Transformer for Shore Power with Taps for 190/208/220/230 VAC
Digital Voltage/Amp Metering
(1) Duplex Maintenance Outlet located on the Curb Side
30 Amp DC Converter with 40 Amp Battery Charger and Battery Condition Metering.
Custom Engraved, Locking External I/O Video/Audio Panel with Light
(4) Waterproof DC Outside Work Lights. 2 - Located on Curb side and 2 – on Street side of the vehicle
Interior Dimmable Operating Lights as Required
Interior 12 V DC Courtesy Ceiling Light
Removable Commercial Grade Swivel Chairs with Tie Down
Remote Controlled Burglar Alarm System on All Access Doors

Visit Our Web Site: www.shook-usa.com

All SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.