


Floor Plans of the A-50 T EXP

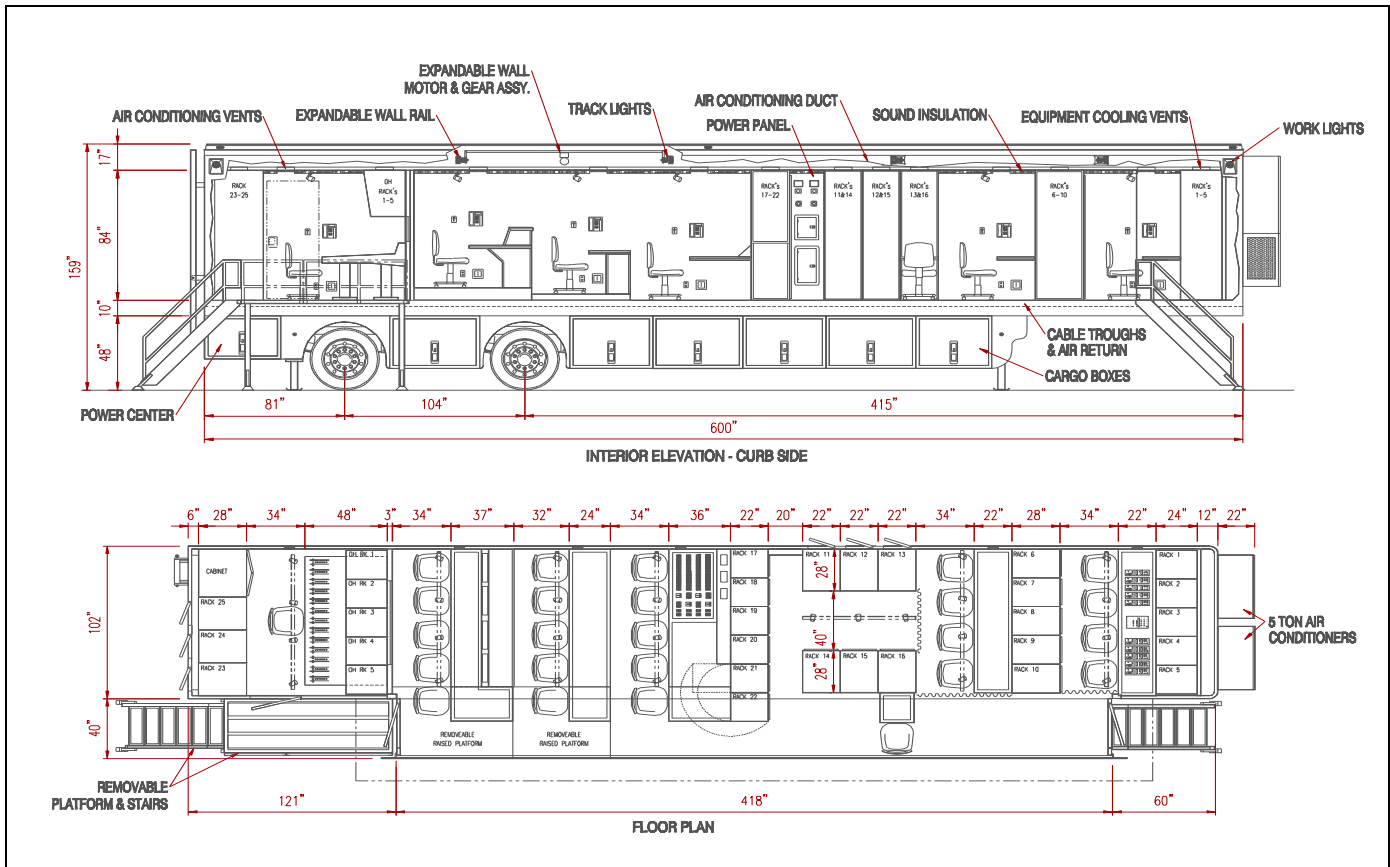

SHOOK A-50 T EXP SPECIFICATIONS

THE CHASSIS

50 Foot Custom Built Trailer
 Dual line hydraulic brake system
 Type T-2 air ride axle suspension or equivalent 22,675 kg [50,000 lbs.]
 Underbody Undercoating (Petroleum Based)
 Multi-coat Dupont Imron® paint (wide variety of color choices)

AVAILABLE OPTIONS

Hydraulic Stabilizing Jacks
 Telephone system
 Fire extinguishers
 Aluminum wheels and hub covers
 3 phase power distribution
 12 VDC electrically powered rewind cable reels capacity of 100m of 12 mm
 Removable manual or power reels size as specified

THE HOUSING AREA

Reinforced Interior Walls, Floor and Ceiling (Aircraft Composite Material)
 Sonex™ or equal Sound Reducing Ceiling Treatment
 Industrial Grade Tight Looped Anti-Static Carpet
 Nonflammable, Hard Packed Fiberglass Insulation
 Custom Built Equipment Racks with Operator Consoles
 Exterior Paint is Dupont Imron® Multi-Coat OEM paint (White)
 Dual 60,000 BTU Air Conditioner with Shook Hot Gas Bypass Valve Modification. Includes 5KW (x2) heat strip
 UL® Approved Power Panel with Separate Circuit Breakers and Individual Power Strips in each rack
 50 KVA Isolation Transformer for Shore Power with Taps for 190/208/220/230/240/277 VAC
 Digital Voltage/Frequency Metering
 (1) Duplex Maintenance Outlet located on the Curb Side
 30 Amp DC Converter with 40 Amp Battery Charger
 Custom Engraved External I/O Video/Audio Panel with Light
 Waterproof Three DC Outside Work Lights on Curb side and Street side of the vehicle
 Interior 12 V DC Ceiling Light above each entrance door
 Fluorescent work lights in the work areas
 (1) DC Work Light in all Storage Compartment
 Removable Swivel Chairs with Tie Down
 Remote Controlled Burglar Alarm System on All Access Doors

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.